



ROLLER SHUTTER PROFILE



Foam-filled Slats For Roller Shutter


ULEPANDA

▼ 6 Product Features

- Sun-shading
- Sound insulation
- Wind-proof and dust-proof
- Ventilation and dimming
- Cold proof
- Privacy and security



▼ 40mm*0.30mm Aluminum Slat

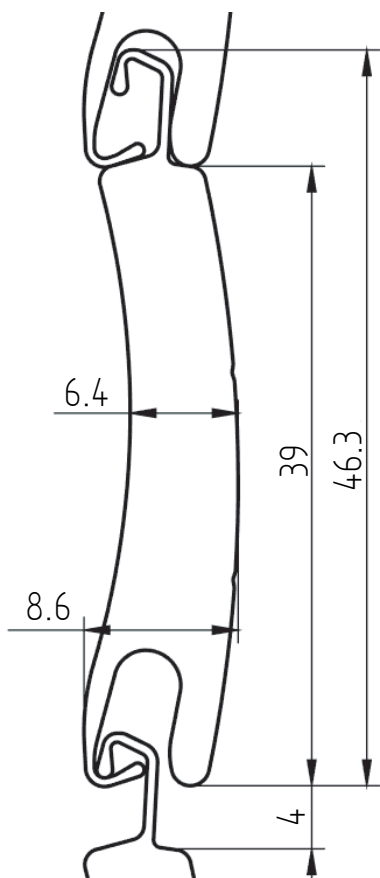

Technical Specifications

Size	40mm
Nominal Thickness	8.6mm
Plate Thickness	0.3mm
Weight	120g/m, 3kg/m ²
Lighting Hole Size	1×12mm
Pu Density	60-65kg/m ³
Maximum Shutter Width	≤2.4m
Maximum Shutter Height	≤3.0m
Slats Per Meter	25


Packing Data

Length	5.8m-6.5m
Slats Per Package	50 Pcs



Diameters of winding

Height (mm)	Diameter		
	φ40	φ50	φ60
600	105	120	125
800	125	140	135
1000	140	140	140
1200	145	160	155
1400	160	160	160
1600	165	170	165
1800	170	180	175
2000	180	185	180
2200	180	195	190
2400	195	195	195
2600	200	200	195
2800	200	215	210
3000	215	215	210
3200	215	220	215
3400	215	230	225
3600	230	230	230
3800	235	235	230
4000	235	250	240

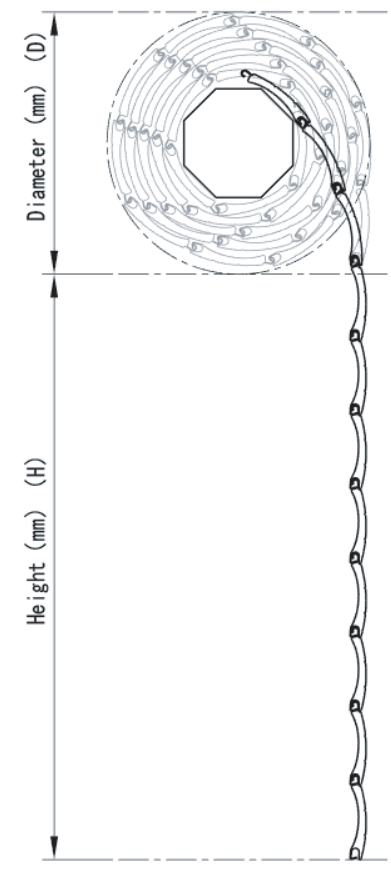


▼ RICH COLORS

For all the visible surfaces of our products made of aluminum, we offer five common color combinations or customized by RAL colors. The color scheme will always match your building space perfectly.

BASIC COLOR



PERSONALIZED COLOR

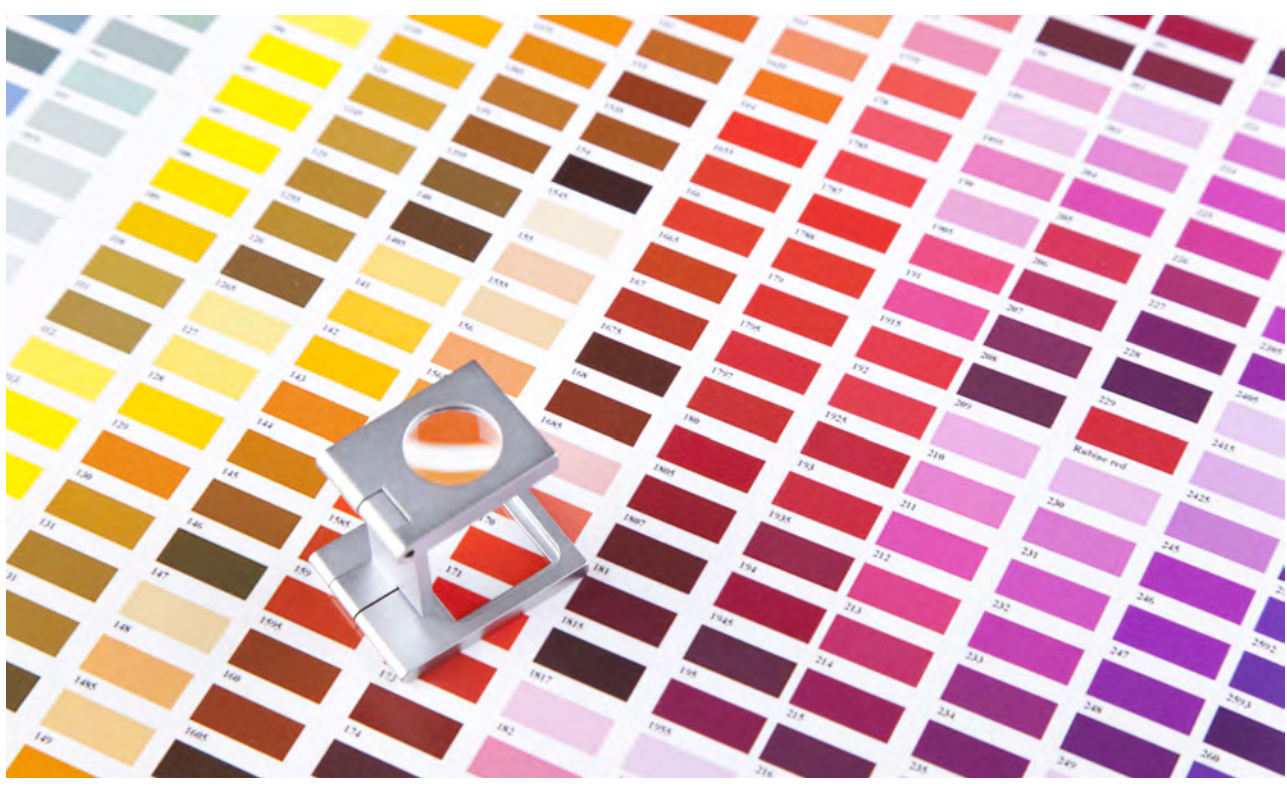


▼ QUALITY ASSURANCE



- Five years warranty for the condition under regular use and maintenance and without human damage;
- Provide five years the quality assurance of aluminum alloy materials do not fade.

EXCELLENT CRAFTSMANSHIP

Imported from Italy production line, each production shift, each batch of materials has a self-inspection sample to ensure 100% quality inspection and comply with the EU standards. Each product will be the same.

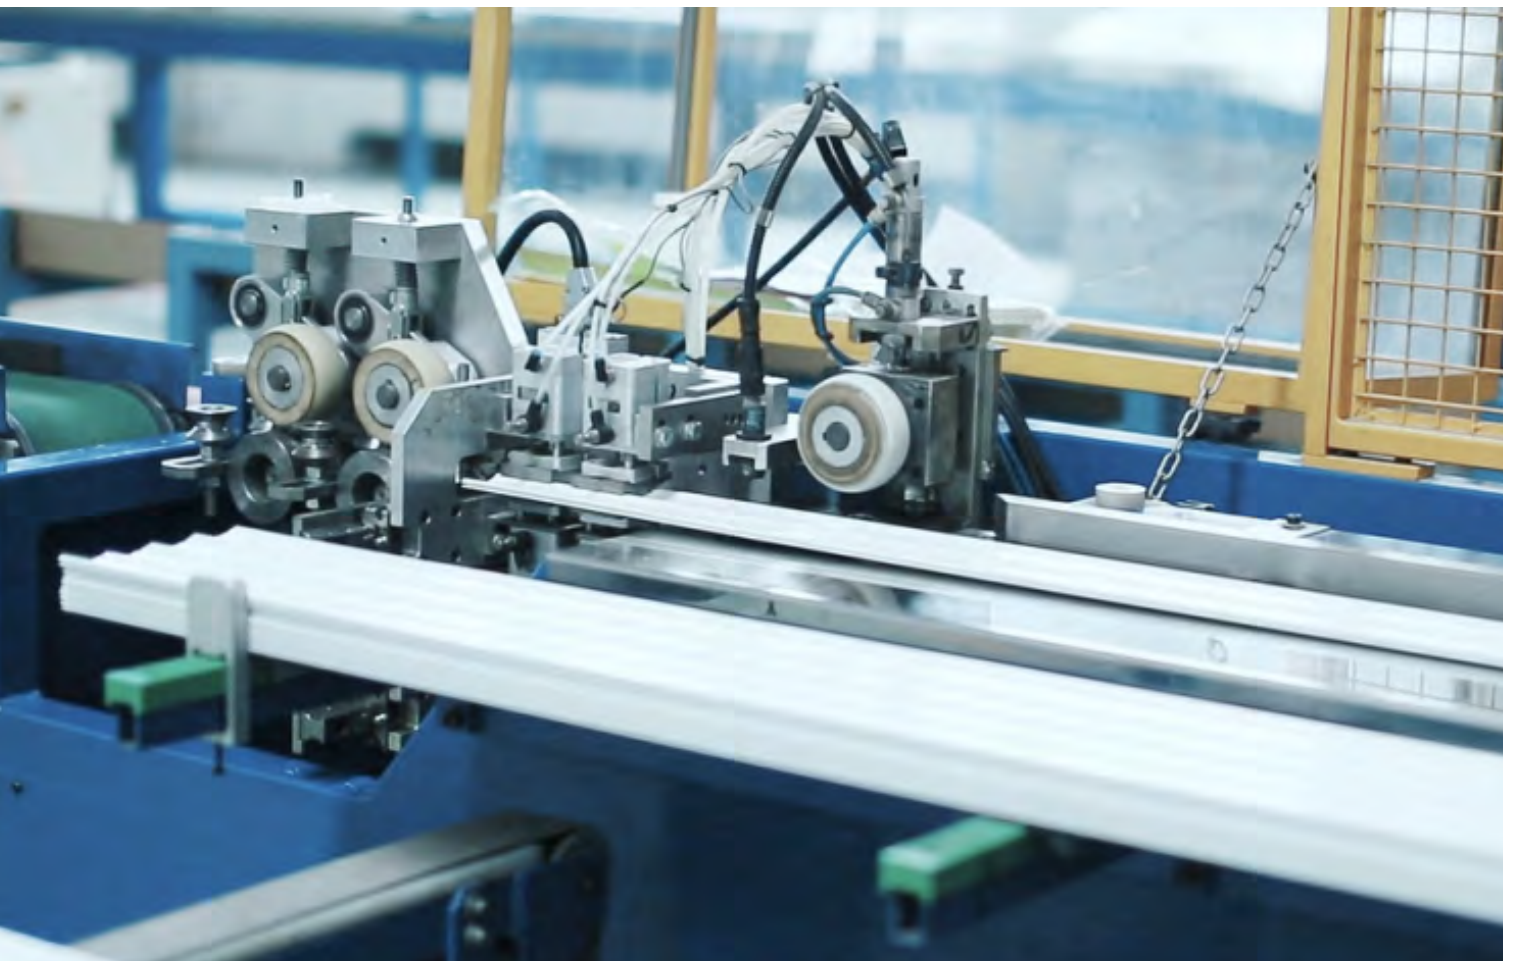

ULEPANDA

ULE PANDA

Craft by Nanjing Jinxing Yu
Energy Saving Technology Co., Ltd

Address: 6 Liyuan Rd, Pukou District, Nanjing, Jiangsu, China, 211806

Email: info@ulepanda.com

www.ulepanda.com

